




10/522624
10/00 2004 / 000216
Rec'd PAT/PTO 22 FEB 2005



INVESTOR IN PEOPLE

GB04/216




The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

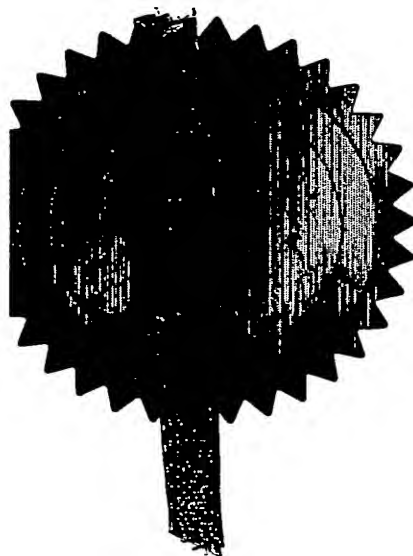

BEST AVAILABLE COPY


Signed

Stephen Hordley
22 June 2004

Dated

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

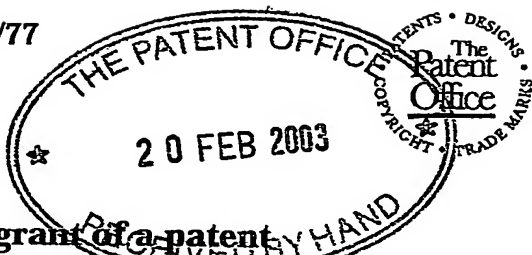

21 FEB 03 15:00 00284
P01/7700 0.00-0303918.7

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

HL84364/000/ASG

2. Patent application number

(The Patent Office will fill in this part)

0303918.7

20 FEB 2003

3. Full name, address and postcode of the or of each applicant (underline all surnames)

GOODRIDGE (UK) LTD
Exeter Airport
Exeter EX5 2UP

Patents ADP number (if you know it)

599029602

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

4. Title of the invention

END FITTING FOR TUBULAR MEMBER

5. Name of your agent (if you have one)

Haseltine Lake

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Imperial House
15-19 Kingsway
London
WC2B 6UD

Patents ADP number (if you know it)

34001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form -

Description 7

Claim(s) 3

Abstract 1

Drawing(s) 2

10. If you are also filing any of the following, state how many against each item.

Priority documents -

Translations of priority documents -

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*) -

Request for preliminary examination and search (*Patents Form 9/77*) 1

Request for substantive examination (*Patents Form 10/77*) -

Any other documents (please specify) -

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

19 February 2003

12. Name and daytime telephone number of person to contact in the United Kingdom

Mr A S Giles

[0117] 910 3200

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

END FITTING FOR TUBULAR MEMBER

This invention relates to end fittings for tubular members and particularly, although not exclusively, relates to improved end fittings for high pressure hydraulic hoses.

BACKGROUND OF THE INVENTION

10 Conventional hydraulic hose fittings are crimped or swaged to the end of a hydraulic hose. Figure 1 shows a conventional swaged hose fitting comprising a collar 2 which fits over the outer surface of a hydraulic hose 4.

15 A hydraulic connector 6 is connected to the hose 4 by means of an integral sleeve 8 which is inserted into a bore 10 of the hose 4 until the connector 6 abuts an end of the hose 4. The position of the collar 2 is adjusted such that it overlaps the hose 4 and connector 6. The collar 2 is then forced radially inwardly in a direction D by means of a crimper or swager, until it assumes the orientation, illustrated in Figure 1, in which the hose 4 is compressed between the collar 2 and sleeve 8.

Although such fittings are generally reliable, they require an expensive crimper or swager to assemble them. Furthermore, the bore 12 formed in the sleeve 8 is either smaller than the bore 10 of the hose 4 at the outset, or is reduced in diameter in the crimping or swaging process, so that the fitting restricts the maximum flow which could otherwise pass through the hose 4.

STATEMENTS OF INVENTION

According to the present invention there is provided a
5 fitting for connection to an end of a tubular member
such as a hose or pipe, the fitting comprising a collar
which is received over an outer surface of an end of
the tubular member, and a separate externally threaded
10 sleeve which has an outside diameter which is larger
than an internal diameter of the tubular member, and
which is screwed into the tubular member to expand the
tubular member and trap it between the collar and the
sleeve.

15 Preferably, the collar is closely received over an
outer surface of the tubular member.

Preferably, an internal bore of the collar is
cylindrical. Preferably, the internal bore is smooth,
20 as opposed to having surface discontinuities such as
serrations, ridges or barbs.

Preferably, the sleeve forms a thread in an internal
wall of the tubular member as it is screwed in.
25

The thickness of a side wall of the sleeve may decrease
towards its distal or leading end. For example, the
distal end of the sleeve may be chamfered.

30 Preferably, the sleeve has an internal bore which is no
smaller than an internal bore of the tubular member
prior to insertion of the sleeve. Preferably, the
tubular member is a hose. Most preferably the tubular
member is a high pressure hydraulic hose.

Preferably, the sleeve is connected to a hydraulic connector at its end remote from a threaded end of the sleeve.

5

Preferably, the tubular member is formed from a polymer, such as Teflon.

Preferably, the tubular member comprises a resilient inner hose within a braided metal outer sheath.

10

Preferably, the thread on the threaded sleeve is 36 UNF or 28 UN on G-Line style pitch.

15 Preferably, the sleeve is provided with a secondary thread which engages in a corresponding thread formed on the collar. Preferably, the secondary thread is of larger diameter than the primary thread on the sleeve.

20 According to a second aspect of the present invention, there is provided a method of connecting a fitting to an end of a tubular member, the method comprising the steps of:

(a) fitting a collar over a free end of the tubular member;

25

(b) screwing a threaded sleeve of the fitting, which sleeve has an outside diameter larger than an internal diameter of the tubular member, into the tubular member, thereby expanding the tubular member and

30 trapping it between the collar and the sleeve.

According to a third aspect of the present invention there is provided a fitting for connection to an end of a tubular member such as a hose or pipe, the fitting

comprising a collar which is received over an outer surface of an end of the tubular member, and a separate sleeve which has an outside diameter larger than an internal diameter of the tubular member, and which is forced into the tubular member, thereby expanding the tubular member and trapping it between the collar and the sleeve.

Preferably, the sleeve is threaded and is forced into the tubular member by being screwed in. Preferably, the threaded sleeve forms a corresponding thread in an internal wall of the tubular member.

BRIEF DESCRIPTION OF THE DRAWINGS

For a better understanding of the present invention, and to show more clearly how it may be carried into effect, reference will now be made, by way of example, to the accompanying drawings, in which:-

Figure 1 shows a conventional swaged hose fitting;

Figures 2a to 2c show the principal steps in assembling a hose fitting in accordance with the present invention;

Figures 3a to 3c show the principal steps in assembling a hose fitting in accordance with an alternative embodiment of the present invention.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Figure 2a shows a hose fitting for attachment to a hydraulic hose 204. The hose fitting comprises a

cylindrical collar 202, and a hydraulic fitting 206 in the form of a banjo connector. The hydraulic fitting 206 is machined in one piece with an integral cylindrical sleeve or tail piece 208. The sleeve 208 is formed with an internal bore 207 which extends from a distal end 205 of the sleeve 208 into a larger bore 209 formed through the hose fitting 206. The sleeve 208 has an external thread 211 which may for example be 36 UNF or 28 UN on G-Line style pitch, and has a chamfered distal end 205.

In use of the hydraulic fitting, the collar 202 is pushed onto a free end 201 of the hose 204 until the free end 201 of the hose 204 is flush with a free end 203 of the collar 202. In order to aid in aligning the collar 202 with the hose 204, an annular flange (not shown), which projects radially inwardly from the collar 202, may be provided at the free end 203 of the collar 202. The hose 204 can then abut against the flange when the hose 204 is correctly positioned within the collar 202.

An internal bore d_1 of the hose 204, and the external diameter d_2 of the thread on the sleeve 208 are sized such that, as the sleeve 208 is screwed into the hose 204, it forces the hose 204 radially outwardly and cuts a corresponding thread in the hose 204.

Figure 2b shows the sleeve 208 partially threaded into the hose 204, and Figure 2c shows the sleeve 208 fully seated. As illustrated in Figure 2c, as the sleeve 208 forces its way along the hose 204, the wall of the hose is forced radially outwardly against the collet 202, so that there is a gradual reverse crimping or swaging

action, in which the wall of the pipe 204 is trapped between the sleeve 208 and the collar 202.

It has been found experimentally that a hose connection
5 made in accordance with this embodiment of the invention is capable of withstanding a hydraulic pressure in excess of 8000 lb/in². However, in applications where a very small hydraulic fitting is required, or where consistent high pressures are
10 encountered, the hydraulic fitting can be modified in the manner illustrated in Figures 3a to 3c. In this embodiment, a secondary male M5 thread 312 is formed on a proximal end of a shortened sleeve 308. This secondary thread 212 is of larger diameter than the
15 primary thread 311 formed on the sleeve 308. A corresponding female thread 314 is formed in a distal end of a modified collar 302. The principle of assembly of this embodiment is identical to the previous embodiment. However, after the primary thread
20 311 on the sleeve 308 is engaged for substantially three quarters of its length within the bore 310 in the hose 304, the secondary male thread 312 engages with the secondary female thread 314. This provides a direct threaded engagement between the collar 302 and
25 the hydraulic fitting 306. Figure 3b shows the point of engagement of the secondary male thread 312 with the secondary female thread 314 and Figure 3c shows a fitting 306 screwed fully into the hose 304 and collar 302.

30 Although the specific embodiment relates to a hydraulic fitting in the form of a banjo connector, the present invention is applicable to connecting any type of fitting to a tubular member, such as a hose or pipe.

For example, it could be used in the assembly of a domestic plumbing fitting with appropriate selection of materials for the various components.

- 5 Preferably, the hose 204, 304 comprise a Teflon inner hose surrounded by a braided steel outer sheath. It is preferable that the material of the hose is able to be tapped by the primary thread 211, 311, but any material is contemplated for the hose. Also the hose may be of
- 10 one piece construction or may comprise any number or combination of inner or outer elements. Furthermore, the primary thread 211, 311 formed on the sleeve 208, 308 may be of any suitable specification for the particular materials of the sleeve and hose. However,
- 15 in experiments with Teflon hoses, a thread of 36 UNF or 28 UN on G-Line style pitch proved extremely effective and reliable.

CLAIMS

1. A fitting for connection to an end of a tubular member, the fitting comprising a collar which is
5 received over an outer surface of an end of the tubular member, and a separate externally threaded sleeve which has an outside diameter which is larger than an internal diameter of the tubular member, and which is
10 screwed into the tubular member to expand the tubular member and trap it between the collar and the sleeve.
2. A fitting as claimed in claim 1, in which the sleeve forms a thread in an internal wall of the
15 tubular member as it is screwed in.
3. A fitting as claimed in any one of the preceding claims, in which the leading edge of the sleeve is chamfered.
- 20 4. A fitting as claimed in any one of the preceding claims, in which the thickness of a side wall of the sleeve decreases towards its distal end.
- 25 5. A fitting as claimed in any one of the preceding claims, in which the sleeve has an internal bore which is greater than or equal to an internal bore of the tubular member prior to insertion of the sleeve.
- 30 6. A fitting as claimed in any one of the preceding claims, in which the tubular member is a hose.
7. A fitting as claimed in claim 6, in which the tubular member is a high pressure hydraulic hose.

8. A fitting as claimed in any one of the preceding claims, in which the sleeve is connected to a hydraulic connector at its end remote from a threaded end of the sleeve.

5

9. A fitting as claimed in any one of the preceding claims, in which the tubular member is formed from a polymer.

10 10. A fitting as claimed in claim 9, in which the tubular member is formed from Teflon.

11. A fitting as claimed in any one of the preceding claims, in which the tubular member comprises a
15 resilient inner hose within a braided metal outer sheath.

12. A fitting as claimed in any one of the preceding claims, in which the thread on the threaded sleeve is
20 36 UNF or 28 UN on G-Line style pitch.

13. A fitting as claimed in any one of the preceding claims, in which the sleeve is provided with a secondary thread which engages in a corresponding
25 thread formed on the collar.

14. A fitting as claimed in claim 13, in which the secondary thread is of larger diameter than the primary thread.

30

15. A fitting as claimed in any one of the preceding claims, in which an internal bore of the collar is cylindrical.

16. A fitting as claimed in claim 5, in which the internal bore of the collar is smooth.

17. A method of connecting a fitting to an end of a tubular member, the method comprising the steps of:





5 (a) fitting a collar over a free end of the tubular member;

10 (b) screwing a threaded sleeve of the fitting, which sleeve has an outside diameter larger than an internal diameter of the tubular member, into the tubular member, thereby expanding the tubular member and trapping it between the collar and the sleeve.

18. A fitting for connection to an end of a tubular member, substantially as described herein, with
15 reference to and as shown in the accompanying drawings.

ABSTRACTEND FITTING FOR TUBULAR MEMBER

A fitting for connection to an end of a tubular member
5 204, 304, such as a hose or pipe, the fitting
comprising a collar 202, 302 which is received over an
outer surface of an end of the tubular member 204, 304,
and a separate externally threaded sleeve 208, 308
which has an outside diameter d_2 which is larger than
10 an internal diameter d_1 of the tubular member 204, 304,
and is screwed into the tubular member 202, 304 to
expand the tubular member and trap it between the
collar 202, 302 and sleeve 208, 308.

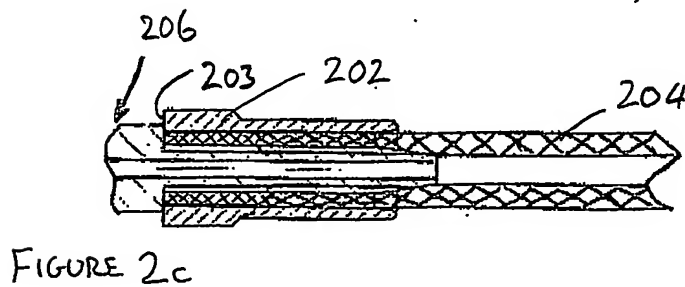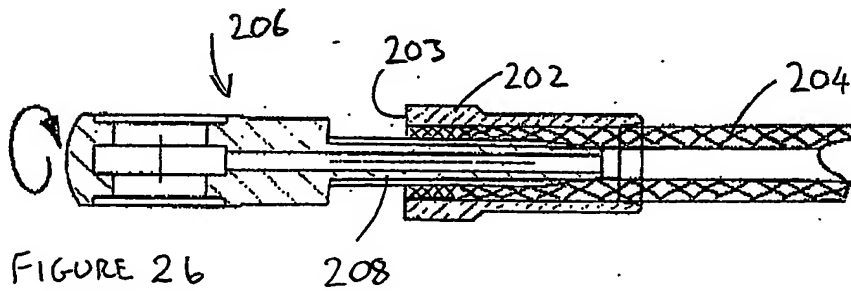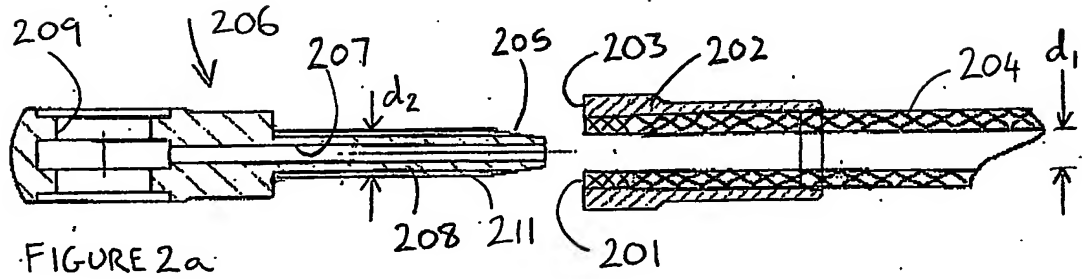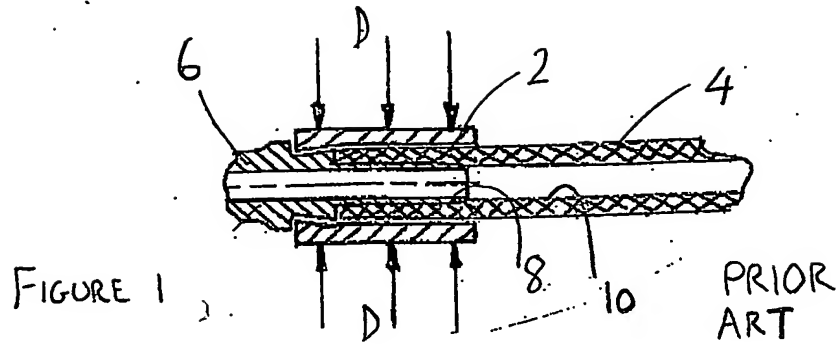

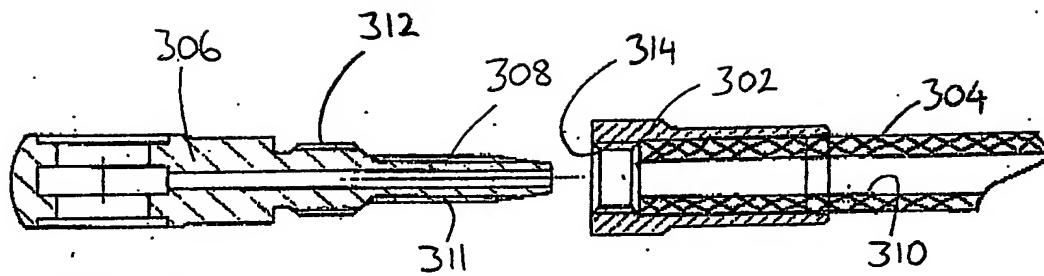


FIGURE 3a

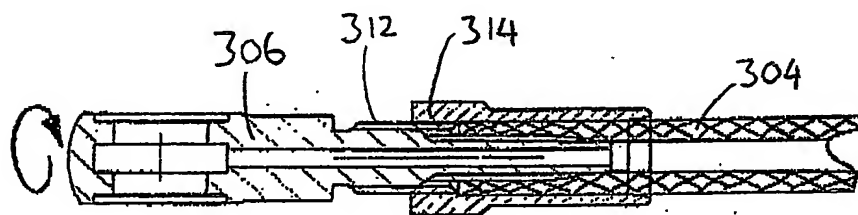


FIGURE 3b.


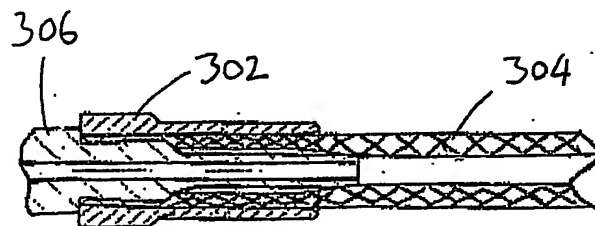


FIGURE 3c

PCT Application
PCT/GB2004/000216



**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☒ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.